

# RACK MOUNT SERIES

**RM10**

The RM-10 mixer is designed with the contractor in mind. Easy to install in any application, the single rack space mixer provides a total of 10 input channels: 8 mic or line level inputs, two stereo inputs, and a front mounted 1/8" jack for use with a computer or MP3 player. The 10 signal presence LEDs ensure that the proper level of signal is being received by the mixer, while the segmented Output Meter allows easy monitoring of the level leaving the RM-10. Mic or line level outputs make going to another mixer or amplifier easy, and the link connection ensures expanding your inputs simple. Other features include phantom power and pad switches on all mic/line inputs.

- 10 Input Rack Mount Mixer
- Eight Mic/Line inputs with Phoenix Block Connectors
- Two Stereo RCA Summing Inputs
- One 1/8" stereo on front panel
- Mic and Line Level outputs
- 10 Signal Presence LED's
- 10 Segment LED Output Meter

## Specifications:

**Frequency Response:** 20 Hz~20kHz

**Inputs:** (8) x 3 Pin Phoenix Block,  
(2) x RCA Stereo Summed,  
(1) x 1/8" Stereo Summed

**Outputs:** (1) x 3 Pin Phoenix Mic Level  
(1) x 3 Pin Phoenix Line Level  
(1) x 1/4" Line Level

**Phantom Power:** 48Vdc switchable blocks of four channels

**Link Buss:** (1) x 1/4" TRS Link Jack

**Pad Switches:** Channels 1~8

**Indicator LED's:** 10 Segment VU,  
Signal Presence

**THD+N:** <0.5% 20Hz-20kHz

**SRN:** >100.5 dB, 20Hz~20kHz


**CMRR:** 40dBv

**Power Requirements:** 12Vdc/1.3A

**Maximum Output Level:** +14dBu

**Dimensions:** 19" W x 1.75" H x 6.25" D  
(482.6mm x 44.45mm x 158.7mm)

**Weight:** 5lbs (2.26 kg)

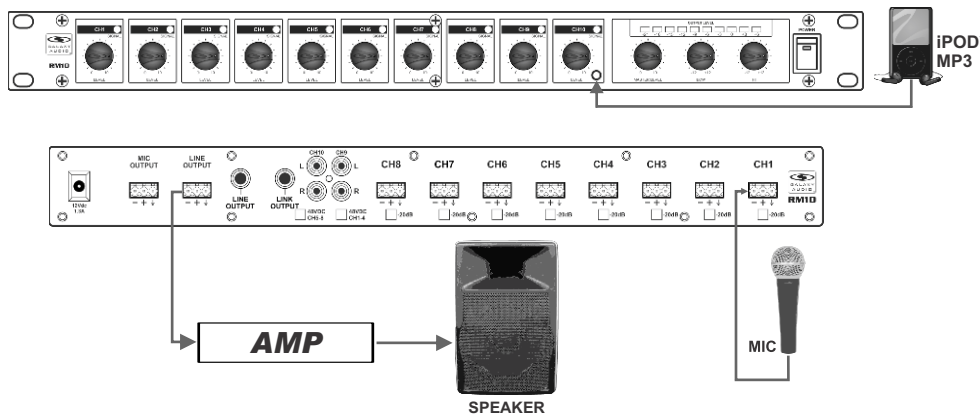

MAKERS OF THE ORIGINAL  
HOT SPOT PERSONAL MONITOR

Specifications subject to change without notice.

\*iPod is a registered trademark of the Apple Company Inc.

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 [www.galaxyaudio.com](http://www.galaxyaudio.com)

Distributed outside the United States by E and E Exports, Inc. 2815 Junipero Ave. Suite 101 Signal Hill, CA 92614

562.988.3447 FAX 562.989.3037

Distributed in Canada by Audio Distributors International (ADI) 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada

450.449.8177 FAX 450.449.8180