

GOOSE NECK MICROPHONES

CONDENSER MICROPHONE

GN-CC116

GN-CC116L

(with Ring Lamp)

- FOR CONFERENCES, INTERVIEWS, AUDIO MIXING, DJ, BROADCASTING
- IDEAL FOR BOARDROOMS, CONFERENCE ROOMS, PULPITS, PODIUMS, NEWSROOMS



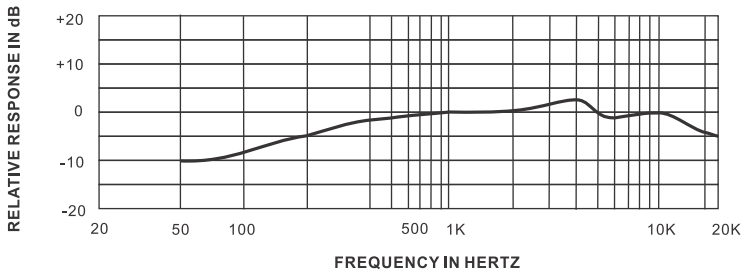
<http://www.galaxyaudio.com/InstallMics.php>



SPECIFICATIONS:

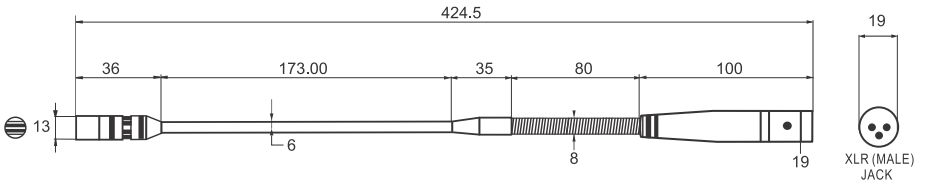
Element.....	Back Electret Condenser
Polar Pattern.....	Unidirectional(Cardioid)
Frequency Response.....	50 Hz to 18,000 Hz
Sensitivity.....	65dB +/- 3dB (0dB= 1V/microbar at 1KHz)
Impedance.....	200 ohms (at 1KHz)
Operating Voltage.....	Phantom Power: 9V ~ 52V D.C. 2mA typical (GN-CC116) 6mA typical (GN-CC116L)
Current Drain.....	Less than 2.0 mA
Output Connector.....	3-Pin XLR (Male)
Weight.....	4.2 oz (118 g)
Dimensions.....	Ø .75" x 16.7" (19 x 424mm) (GN-CC116) Ø .75" x 16.75" (19 x 426mm) (GN-CC116L)
Accessory.....	Foam Windscreen

Frequency Response Graph:

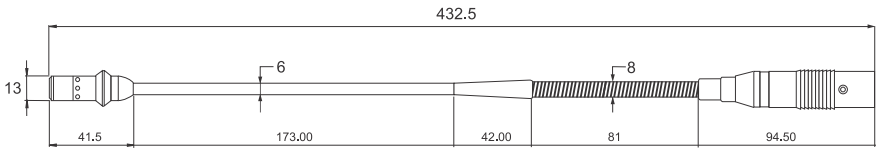
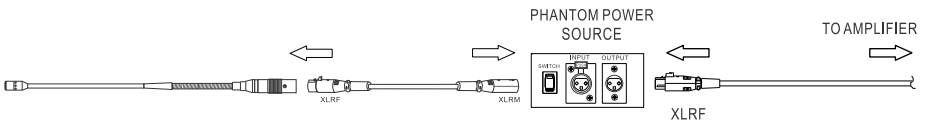


Dimension: GN-CC116

(Unit: mm)

**Dimension: GN-CC116L**

(Unit: mm)

**TYPICAL CONNECTION:**



MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR



www.galaxyaudio.com

THREE YEAR LIMITED WARRANTY

WARRANTY Information can be viewed online at
<http://www.galaxyaudio.com/warranty.php>



www.galaxyaudio.com/warranty.php

GN-CC116/GN-CC116L USER'S MANUAL

Specifications in this manual are subject to change without notice.
For the most up to date manual and information
visit www.galaxyaudio.com.

1-800-369-7768 www.galaxyaudio.com

© Copyright Galaxy Audio 2014