

### Included Components

1. PA6BT x1
2. IEC Power Cable x1
3. MSA-1 Stand Adapter x1
4. Quick Start Guide x1



### Setup



1 Connect power cable to PA6BT, connect other end to a power outlet.




2 Choose the input needed and for what channel(s) needed:  
XLR/1/4" Combo Jack for mic, or balanced/unbalanced line level.  
1/8" for stereo from a media player etc.



3 For a balanced mic signal, plug the XLR male end of the cable into the XLR/1/4" Combo Input on the PA6BT. For strong signals, engage the -20dB Pad Switch to prevent distortion.



4 For Balanced or Unbalanced Line Level, plug the 1/4" cable into the XLR/1/4" Combo Jack on the PA6BT.

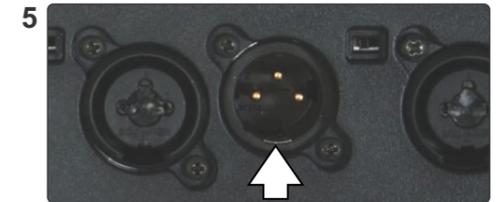

5 Connect a female XLR to the Thru output to feed the channel's XLR input to another device.



6 For a stereo signal from an MP3 player, attach 1/8" stereo cable into the Channel 2 1/8" input.



7 The Pre Out provides a Line Level mix of all three channels.

### Stand Mounting (Optional)



1 Attach the MSA-1 to the mic stand, then lift the PA6BT over the stand, align it up with the hole.




2 Bring the PA6BT down onto the stand gently until secure.

### Operation



1 Ensure that both channels and/or the Bluetooth® controls have their levels lowered by turning counter-clockwise.

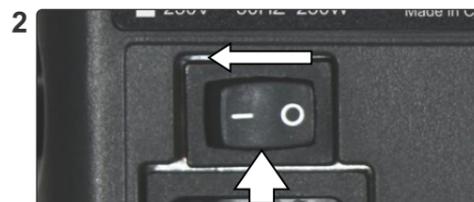

2 Flip the power switch on.



3 Level controls: turn clockwise to raise the level. Turn counter-clockwise to lower the level.



4 Using Bluetooth® - Press the Bluetooth® button. The Bluetooth® LED will flash for 15 seconds. Locate the PA6BT on your device and select to pair. If pairing fails, turn Bluetooth® off and try again. The button also acts as a Stop/Play/Pause. Powering the unit off will disconnect.



5 EQ controls - Low/Mid/Hi: To increase the low, mid, and high frequencies, turn the appropriate tone control clockwise. To decrease, turn counter-clockwise.



6 Reduce Input Levels if the Clip LED turns on. Max. level is reached when the yellow "Comp" light flashes at peak levels. If the light is on constantly, turn the levels down to avoid damage to the PA6BT.



# PA6BT

Full Range Powered Personal Monitor



## Quick Start Guide

## FAQ

- 1. Q. How can I mount my PA6BT to a wall?**  
A. Instructions for the optional YBHS bracket kit can be found in the Hot Spot manual, located at: <http://galaxyaudio.com/pdfs/HotSpot-Manual.pdf>
- 2. Q. I do not get output on the Thru jack when using a 1/4" input.**  
A. The Thru output is only for the XLR input.
- 3. Q. Can I use a condenser microphone with the PA6BT?**  
A. Yes, there is 15VDC Phantom Power on the XLR inputs.
- 4. Q. If I turn the PA6BT off, will I have to reconnect my Bluetooth® device?**  
A. No, the PA6BT remembers the last device it is paired with and will automatically reconnect.
- 5. Q. Can I pause the music from my Bluetooth® device using the PA6BT?**  
A. Yes, when the music is playing, press the Bluetooth® button once. It will pause the music. Press again and it will resume.



# BE HEARD™

## Other Helpful Sources

PA6BT Product Page

PA6BT Manual

(PDF Download)

PA6BT Cutsheet

(PDF Download)

PA6BT How To Video

Specifications subject to change without notice.