
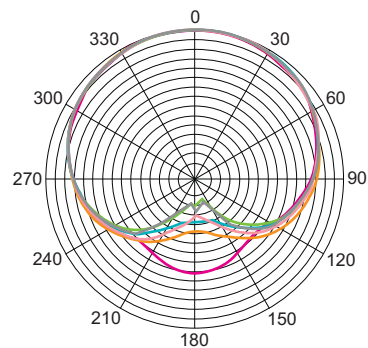


STUDIO MICROPHONE

ST-2

The ST-2/ST-2B are great studio condenser microphones at an affordable price. The ST-2 has an XLR output while the ST-2B has a USB output. Both microphones come with a rugged shock mount.

- Element: $\Phi 34$ Pressure Gradient Transducer
- Polar Pattern: Uni-directional
- Frequency Response: 20Hz-20kHz
- Sensitivity: $-34\text{dB} \pm 2\text{dB}$ ($0\text{dB} = 1\text{V/Pa}$ at 1kHz)
- Output Impedance: $150\Omega \pm 30\%$ (at 1Khz)
- Load Impedance: $\geq 1000\Omega$
- Self Noise: 16dB A Max.
- Max. Input SPL: 132dB (at 1kHz $\leq 1\%$ T.H.D)
- S/N Ratio: 78dB
- Phantom Power Requirement: 48v DC Phantom Power
- Electrical Current: 3mA
- Net Weight: 346g (12.20oz)
- Body Dimension: $\Phi 46 \times 150\text{mm}$

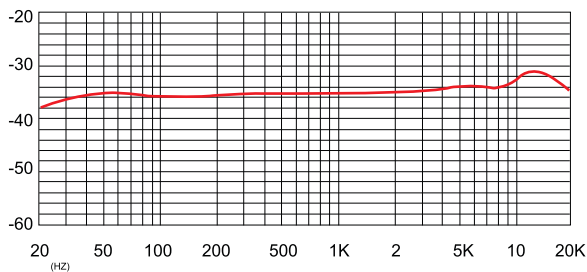

MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR

Specifications subject to change without notice.

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 www.galaxyaudio.com

Distributed outside the United States by E and E Exports, Inc. 2815 Junipero Ave. Suite 101 Signal Hill, CA 92614

562.988.3447 FAX 562.989.3037

Distributed in Canada by Audio Distributors International (ADI) 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada

450.449.8177 FAX 450.449.8180

051711