

AXS MIXER

AXS-16

The new AXS line features a full line of analog audio mixers. The AXS series offers 5 different desk top models with 3 available in a rack mount version. All models have a USB connection to link to a computer for stereo playback or recording and have +48V phantom power to the XLR inputs. Additionally, all mono inputs provide an easy to use single knob compression. Most models feature a 3 band EQ with sweepable mid-range and low cut filter. All models include AUX sends on each channel which are either pre/post or switchable for monitoring/FX or external send.

All AXS models have built-in Studio Grade DSP FX with 16 effects. Effects include Reverb, Chorus, Flanger, Delay, Pitch Shifter, and Multi-Effects. Each effect has a storable user parameter and a tap button with a tempo light that provides for delay and echo settings.

Each channel also provides the user with Clip LEDs, Mute, Subgroup Routing, Solo, L/R Panning and PFL. The mono channels also feature ¼" TRS inserts for flexible connection to outboard effects and processing. Whether using in a fixed install or on the road, the 60mm logarithmic faders and sealed rotary controls will provide clean, reliable sound.

- 16 Input, 8 XLR Mic Input & 4 Stereo Inputs
- 8 +48V Phantom Powered Mic Preamps
- 8 Easy to use Built in Compressors
- 3 Band EQ with Sweep Mids on Each Mono Channel
- 16 Effects with Tap
- USB Audio Interface
- 8 Channel Inserts
- 3 AUX Sends Per Channel
- PFL on Each Channel
- Balanced Main Outputs
- Headphone Output
- Control Room Controls
- 60 mm Logarithmic Faders
- Sealed Rotary Controls
- Switching Power Supply



MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR



AXS MIXER

AXS-16

Specifications

Max. Input Level: Mic +22dBu

Other Line +20dBu

Max. Output Level: Main XLR +28dBu

Other Output +22dBu

Meters: 3 Color LED

Sensitivity: 0VU=+4dBu

Master Meter: 12 Segment, -30dB to clip

Channel meter: Red LED, clip

Frequency Response: +/- 1dB, 20Hz - 30KHz

Mic CMRR at 1kHz: >70dB typical

THD+n at +14dBu at 1kHz: Mic to mix out <0.005%

Crosstalk (@1KHz): Fader shutoff >89dB

Mute shutoff >89dB

Noise, rms 20Hz to 20kHz: Mic Input E.I.N -129dBu

Main mix fader unity,

Channel fader down <-95dBu(-97dB S/N)

Main mix fader unity,

Channel fader unity <-82dBu(-86dB S/N)

Channel HPF: 18dB/oct below 75Hz

Mono EQ: Lo: +/-15dB shelving at 80Hz

Mid: +/-15dB peak at 100Hz to 8kHz

Hi: +/-15dB shelving 12kHz

Stereo EQ: Lo: +/-15dB shelving at 80Hz

Lo-Mid: +/-15dB peak at 500Hz

Hi-Mid: +/-15dB peak at 3kHz

Hi: +/-15dB shelving at 12kHz

DSP: Converter 24-bit sigma-delt,

64/128-times oversampling

Sampling Rate 40kHz

USB: Audio Stereo In/Out

Connector Type B

Converter 16-bit

Sampling Rate 48kHz


Power Supply: 110-240VAC, 50/60kHz

Power Consumption: 50 watts

Fuse: 100-240VAC, T 1.6A, 250V, 5x20mm

Dimensions: 4.65" x 19.1" x 17.44" (118 x 483 x 443 mm) HxWxD

Weight: 15.3 lb (6.95 kgs)

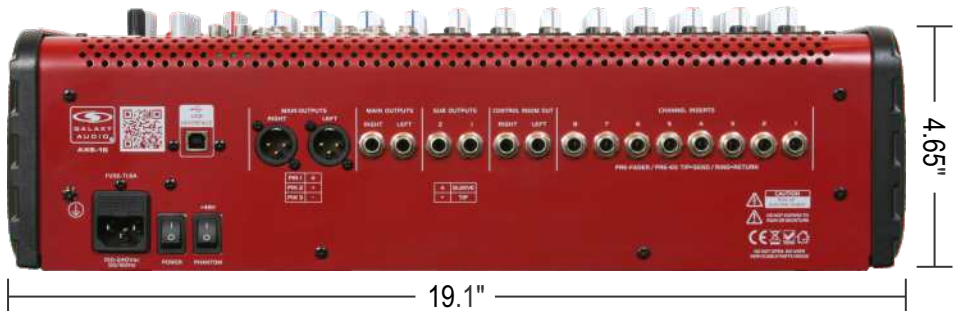

MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR



Specifications subject to change without notice.

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 www.galaxyaudio.com

Distributed outside the United States by **E and E Exports, Inc.** 2815 Junipero Ave. Suite 101 Signal Hill, CA 92614

562.988.3447 FAX 562.989.3037

Distributed in Canada by **Audio Distributors International (ADI)** 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada

450.449.8177 FAX 450.449.8180

V20140825