



CONDENSER MICROPHONE

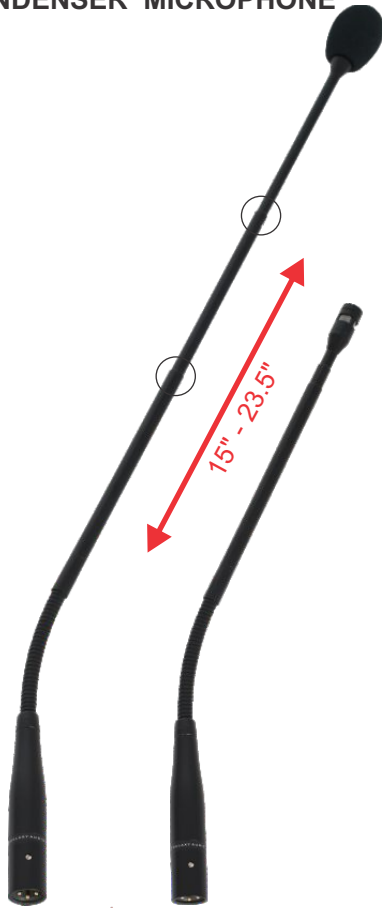

SPECIFICATIONS

Element: Back Electret Condenser
Telescoping Length: 15" - 23.5"
Polar Pattern: Unidirectional (Cardioid)
Frequency Response: 60 Hz to 18,000 Hz
Sensitivity: 7.0795 mV/Pa
Impedance: 250 ohms (at 1KHz)
Operating Voltage: 9V ~ 52V D.C. Phantom Power
Current Drain: Less than 2.0 mA
Output Connector: 3-Pin XLR (Male)
Accessory: Foam Windscreen
Weight: 0.44 lbs (200 g)

Frequency Response Graph:

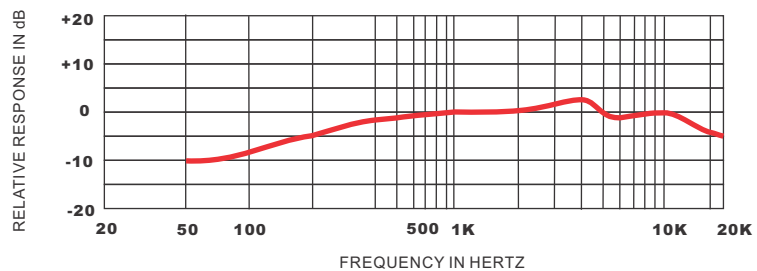

- Condenser/Cardioid
- 60-18kHz
- Sensitivity 7.0795 mV/Pa
- Telescoping from 15" - 23.5"
- XLRM Connector
- Weight: 0.44 lbs (200 g)

• **FOR CONFERENCES, INTERVIEWS,
AUDIO MIXING, DJ, BROADCASTING**

• **IDEAL FOR BOARDROOMS,
CONFERENCE ROOMS, PULPITS,
PODIUMS, NEWSROOMS**

Specifications subject to change without notice.



MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 www.galaxyaudio.com
Distributed in Canada by **Audio Distributors International (ADI)** 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada
450.449.8177 FAX 450.449.8180
Distributed outside the United States by **TradeLink America, LLC.** 230 Kings Mall Ct., Suite 182 Kingston, NY 12401
MikeH@TradeLinkAmerica.com TEL 1.845.246.6200 FAX 1.845.746.9070