



Included Components


1. LA4D x1
2. IEC Power Cable x1
3. Quick Start Guide x1

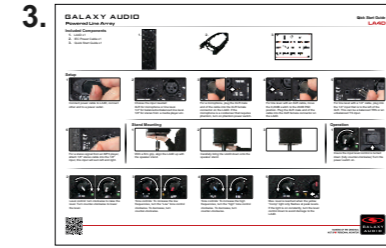


Setup




1 Connect power cable to LA4D, connect other end to a power outlet.

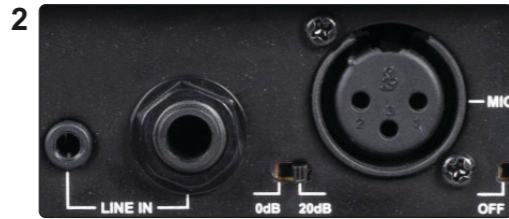

2 Choose the input needed: XLR for microphone or line level. 1/4" for balanced/unbalanced line level. 1/8" for stereo from a media player etc.

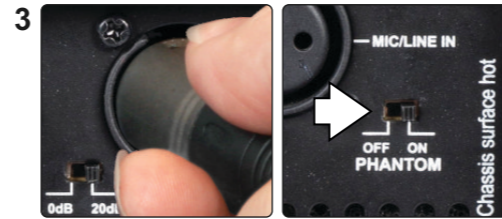

3 For a microphone, plug the XLR male end of the cable into the XLR female connector on the LA4D. If the microphone is a condenser that requires phantom, turn on phantom power switch.

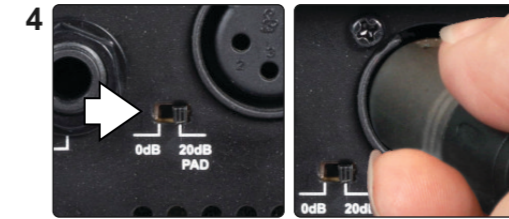

4 For line level with an XLR cable, move the 0,20dB switch to the 20dB PAD position. Plug the XLR male end of the cable into the XLR female connector on the LA4D.



5 For line level with a 1/4" cable, plug into the 1/4" input that is to the left of the XLR. This can be a balanced TRS or an unbalanced TS input.



6 For a stereo signal from an MP3 player, attach 1/8" stereo cable into the 1/8" input, this input will sum left and right.

Stand Mounting



1 With a firm grip, align the LA4D up with the speaker stand.



2 Carefully bring the LA4D down onto the speaker stand.



Operation



1 Insure the input level control is turned down (fully counter-clockwise) Turn the power switch on.



2 Level control: turn clockwise to raise the level. Turn counter-clockwise to lower the level.



3 Tone controls: To increase the low frequencies, turn the "Low" tone control clockwise. To decrease, turn counter-clockwise.



4 Tone controls: To increase the high frequencies, turn the "high" tone control clockwise. To decrease, turn counter-clockwise.



5 Max. level is reached when the yellow "Comp" light only flashes at peak levels. If the light is on constantly, turn the level control down to avoid damage to the LA4D.





Quick Start Guide

FAQ

1. Q. My condenser mic does not work.

A. Make sure the Phantom Power switch is on.

2. Q. I'm using the XLR input, but it is distorted and I can barely turn it up before it is too loud.

A. Engage the 20dB PAD.

3. Q. Will I get left and right when plugging my MP3 player into the 1/8" jack?

A. Yes. It sums the two together.



MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR

BE HEARD™

Other Helpful Sources

LA4D
Product Page



LA4D
Manual



(PDF Download)

LA4D
Cutsheet



(PDF Download)

YouTube
How To Video



Specifications subject to change without notice.