


LINE ARRAY SERIES

LA4D

The new LA4D Series Powered Line Array speakers are the latest in the line of CORE speakers from Galaxy Audio. With an integrated 100 watt amplifier, the Galaxy Audio LA4D Line Array is designed to take advantage of the unique sound dispersion characteristics of multiple stacked drivers. The LA4D has four 4.5" speakers that delivers great vocal clarity. The vertical line array design allows for maximum coverage from a slim, unobtrusive speaker cabinet. The LA4D has a built-in 1-3/8" pole mount socket and a built-in handle for portable use, while the LA4DPM is designed for permanent installation with 14 built-in T-nut mounting points for mounting to walls and ceilings or fly mounting. Self contained and with a small footprint, the LA4D and LA4DPM are the perfect solution for hassle free PA installations, even in acoustically challenging rooms.

The LA4D and LA4DPM has both an XLR input with +48 volt phantom power, a balanced 1/4" input, and a 1/8" TRS summing input for MP3 players etc. With two band EQ control and built-in Compressor/Limiter, the LA4D is perfect for live stage or more permanent installation.

- Internal 100 Watt Amp
- +48V Phantom Power
- XLR, 1/4" and 1/8" Summing Input
- Built-In Compressor
- 2 Band EQ
- Stand or Wall Mountable
- Universal Power Supply
- Vocal Clarity
- Light Weight
- 118 dB Output

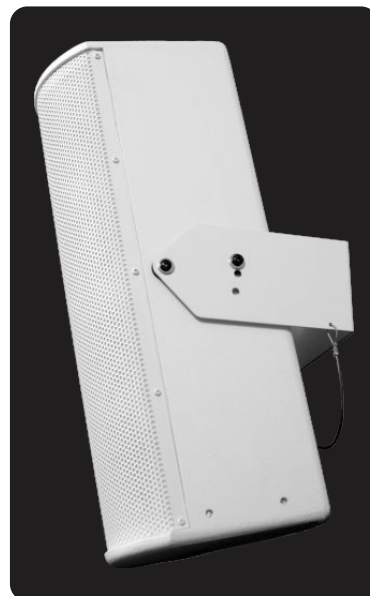

LA4DPM permanent mount with mounting points available in white as shown to right, or in black.

Optional HYBLA4 Yoke Bracket shown



MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR






LINE ARRAY SERIES

LA4D

Specifications

Frequency Response: (± 3 dB) 150 Hz - 17 kHz
Output/Peak: 100 Watts
Sensitivity: 98dB, 1 W @1 m
Speaker Compliment: Four 4.5" Full Range Drivers
Nominal Coverage Pattern: 120° H x 60° V
Input Connections: One Balanced XLR with +48 VDC, One 1/4" Balanced/Unbalanced, One 1/8" Summing
Output Connections: N/A
Controls: Level, High Frequency, Low Frequency, 20dB Pad, Phantom Power
Indicators: Input, Compression
Protection: Compressor/Limiter
Power Supply: 100/240 VAC 50/60 Hz, 1A
Enclosure Material: 15 mm Plywood, Steel Grille
Mounting/Rigging: 1-3/8" Pole Socket (LA4D Only) Fourteen 1/4-20 T-nut Mounting Points (LA4DPM Only)
Handle: Integrated
Color: Black, White (LA4DPM only)
Accessories: N/A
Dimensions: 21.5" x 7" x 7.5" (HxWxD)
(546 x 178 x 191 mm)
Weight: 14.35lbs (6.5kgs)

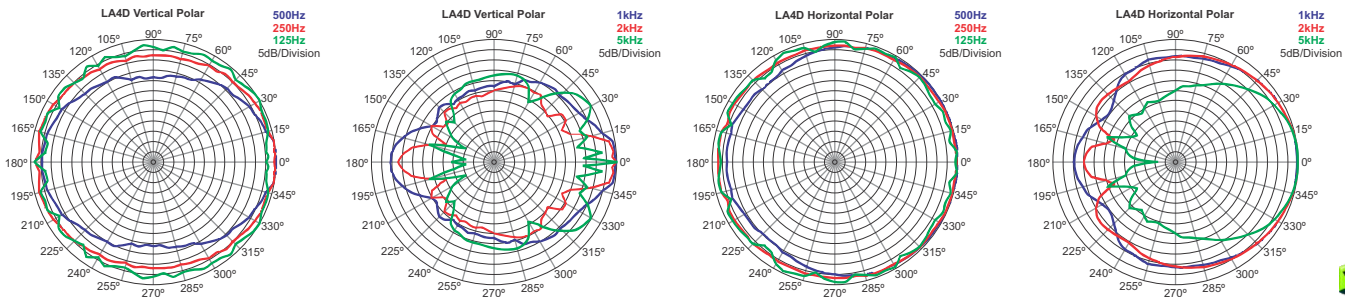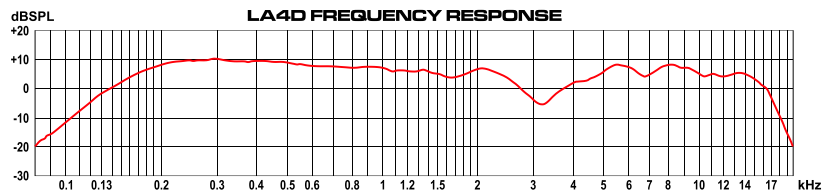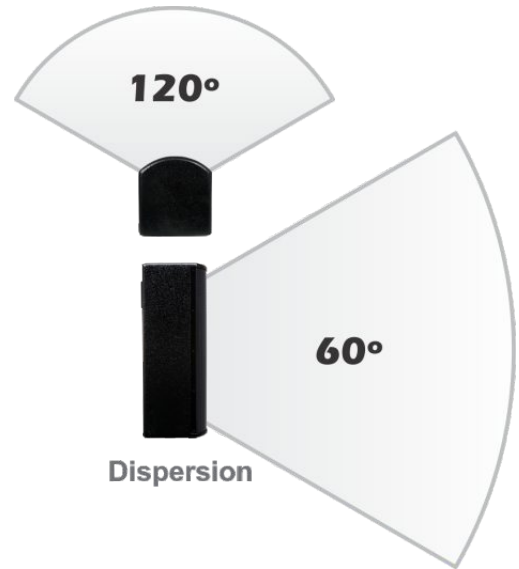

MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR

Specifications subject to change without notice.

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 www.galaxyaudio.com
Distributed in Canada by Audio Distributors International (ADI) 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada
450.449.8177 FAX 450.449.8180

V20160419